

CONSTANTA

RESISTORES DE CARBONO

VALORES ÔHMICOS PREFERENCIAIS

TOLERÂNCIA $\pm 5\%$ (SÉRIE E-24)	TOLERÂNCIA $\pm 10\%$ (SÉRIE E-12)
10 - 11 - 12 - 13 - 15 - 16 - 18 - 20	10 - 12 - 15 - 18
22 - 24 - 27 - 30 - 33 - 36 - 39 - 43	22 - 27 - 33 - 39
47 - 51 - 56 - 62 - 68 - 75 - 82 - 91	47 - 56 - 68 - 82

TIPOS

TAMANHO ^{NÃO} NATURAL

VALORES

CR-25
(0,33 W)



1 Ω a 1 M Ω

CR-37
(0,5 W)




1 Ω a 10 M Ω

CR-52
(0,67 W)




1 Ω a 22 M Ω

CR-68
(1,15 W)



1 Ω a 22 M Ω

CR-112
(2,5 W)

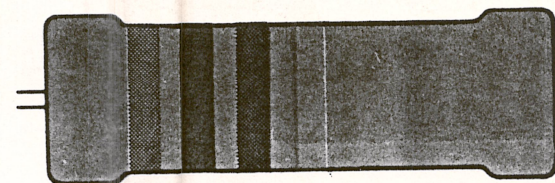

1 Ω a 10 M Ω